


# Wall mounted receptacle

Part number: 75111

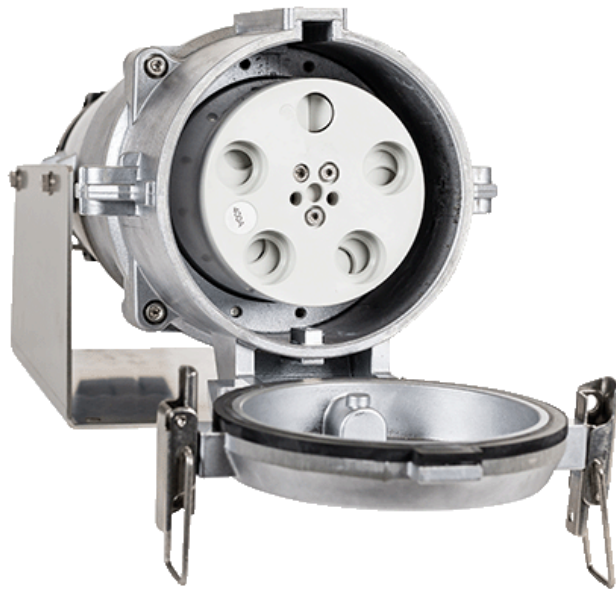

**MENNEKES**  
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1  
57399 Kirchhundem  
GERMANY

[www.MENNEKES.org](http://www.MENNEKES.org)

## Product Description

- MetalLine
- aluminium enclosure
- silver plated contacts, highly heat resistant contact carrier
- external fixing
- 10° inclination
- with cable gland
- sea water products are available on request
- if required, pilot cables can be introduced separately into enclosures, please add "PK" to the part number

## Technical Details

Wall mounted receptacle	75111
Ampere	250A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	silver plated contacts, highly heat resistant contact carrier
X-CONTACT	no
Connection	cage terminals
Contact screw drive	allen key
Pilot contact	2 pilot contacts
Pilot contact switch	no
Blind cable entry at the rear	no
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	10°
Type of mounting	external fixing
Highly resistant to chemicals	no
Military version	no
Lockable	no
Tightening torque connection terminal	16 Nm
Strip length jacket	200 mm

<b>Wall mounted receptacle</b>	<b>75111</b>
Strip length solid conductor	60 mm
Conductor cross-section min.	70 mm <sup>2</sup>
Conductor cross-section max.	240 mm <sup>2</sup>
Conductor cross-section pilot max.	4 mm <sup>2</sup>
Weight (net)	11240 g
Packaging unit	1 pcs
Quantity per pallet	18 pcs
EAN / identification number	4015394055228

**Permissible ambient conditions**

	Min.	Max.
Permissible ambient temperature	-40 °C	100 °C

**Material properties**

Housing	aluminium grey [no RAL colour code]
Front part	aluminium grey [no RAL colour code]
Hinged lid	metal grey [no RAL colour code]

**Material resistance**

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

**Material and environmental properties**

RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards

Norm	DIN EN IEC 60309
Declaration of Conformity	CE
Test label	EAC

# Dimensional Drawing

Drawing  
1 MB 389/1

Dim. in mm

